


TMI-YCS3-16AX-X02

系统接口板 / *System Interface*

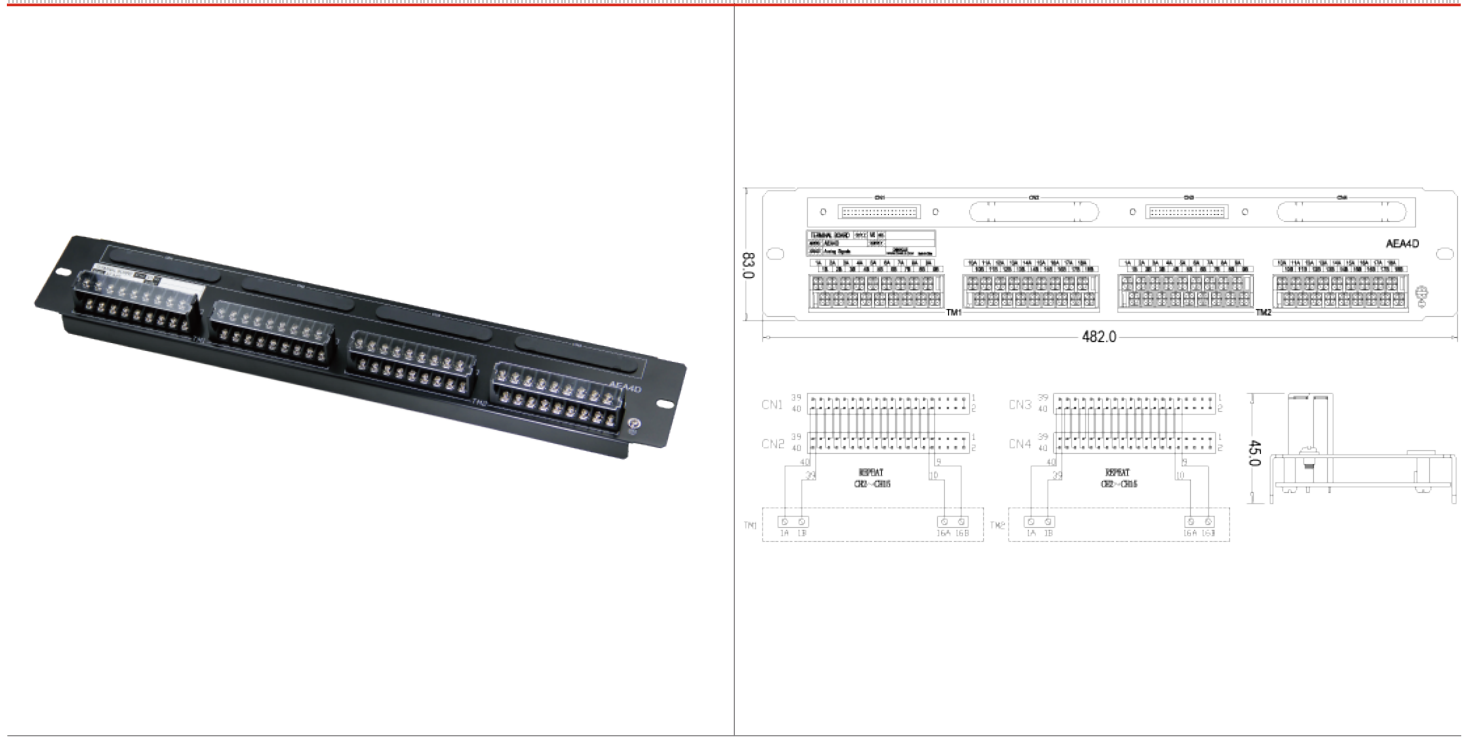

规格说明

适用控制器	YOKOGAWA CS3000
接口板订货规格	TMI-YCS3-16AX-X02
产品功能	AI/AO board
输入电流 Max (单通道)	4-20mA
输入端接口 / 使用线径	MIL 40p male
输出端接口 / 使用线径	18-12AWG/0.75-2.5mm ²
尺寸 mm	482 × 83 × 45
工作温度	-20~+85℃
防尘盖	0032A02000

D_Sub Connector Pin Assignment

Channel	CN1&2 / 3&4		Terminal	
CH1	40	39	1A	1B
CH2	38	37	2A	2B
CH3	36	35	3A	3B
CH4	34	33	4A	4B
CH5	32	31	5A	5B
CH6	30	29	6A	6B
CH7	28	27	7A	7B
CH8	26	25	8A	8B
CH9	24	23	9A	9B
CH10	22	21	10A	10B
CH11	20	19	11A	11B
CH12	18	17	12A	12B
CH13	16	15	13A	13B
CH14	14	13	14A	14B
CH15	12	11	15A	15B
CH16	10	09	16A	16B
			17A	17B
			18A	18B
NC	1	2	3	4
	5	6	7	8