



RMI-AS80-16DI-001



系统接口板 / *System Interface*

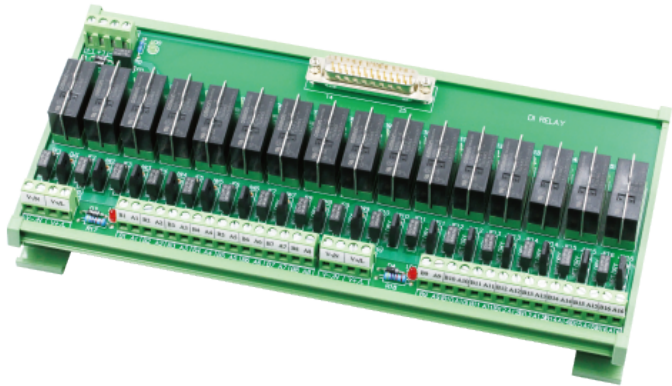

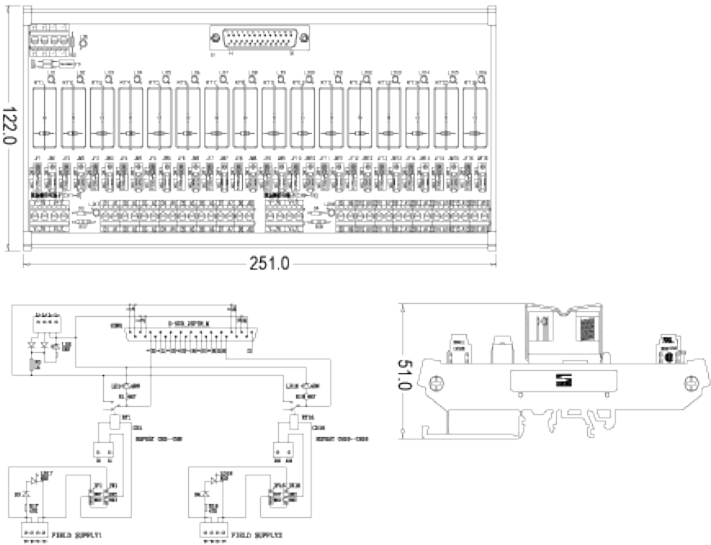

规格說明

适用控制器	ABB S800
接口板订货规格	RMI-AS80-16DI-001
继电器规格	G2RL-1-E 24VDC/OMRON
产品功能	DI Realy
系统端电压	24VDC
系统端电流	1A
现场端电压	24VDC
输入电流 Max (单通道)	250mA
电源指示灯	LED/Red
信号指示灯	LED/Green
输入端接口 / 使用线径	24-12AWG/0.5-2.5mm ²
输出端接口 / 使用线径	D-sub 25p male
尺寸 mm	251X122X52
工作温度	-20~+55℃
熔斷絲	CXPF25M100
熔斷絲	CXPF010110
跨接片	CNPJ000130

D_Sub Connector Pin Assignment

Channel	Con1 DB25 MALE	Terminal
CH1	3	A1 B1
CH2	16	A2 B2
CH3	4	A3 B3
CH4	17	A4 B4
CH5	5	A5 B5
CH6	18	A6 B6
CH7	6	A7 B7
CH8	19	A8 B8
CH9	7	A9 B9
CH10	20	A10 B10
CH11	8	A11 B11
CH12	21	A12 B12
CH13	9	A13 B13
CH14	22	A14 B14
CH15	10	A15 B15
CH16	23	A16 B16
L +	1 14 11 24	
L -	2 15 12 25	
NC	13	